


4. Mount the metal brackets with the double DIN head unit

*The position of the copper coloured holder can be adjusted to your needs (see sample photo below)*

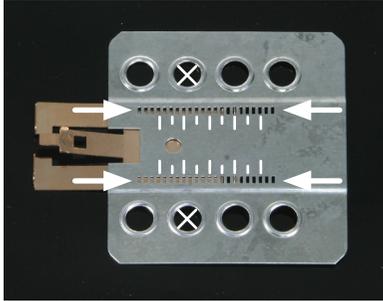

5. Push metal frame into mounting frame. Place both on dashboard


Connect all required circuit points  
Push Double-DIN navigation into metal frame until it snaps in

Place facia plate



**Installation Manual**  
**Double DIN Kit**  
381094-22 (black)  
381094-23 (beige)

• **Fiat 500 2007->**

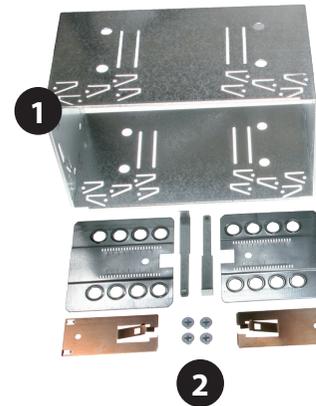

Double DIN Set contents

- (1) Metal Frame
- (2) Mounting accessories
- (3) Mounting Frame
- (4) Facia Plate




1. Remove 4 buttons of OEM-Radio (see arrows)

Use radio release keys to remove radio



2. Remove 2 screws of air vent cover. Remove air vent cover

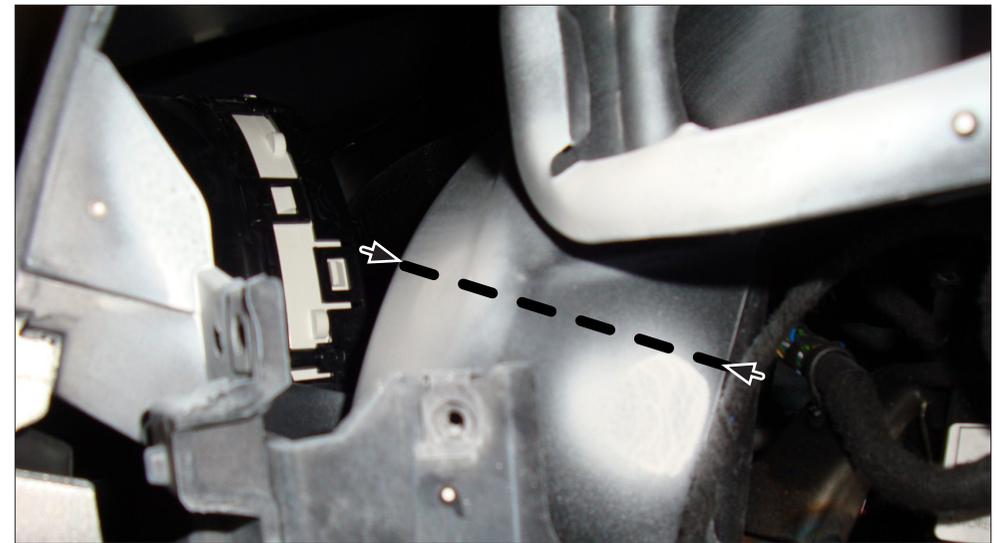

3. Cut here air vents (see dashed line)  
Insulate holes with duct tape

*All installation work must be performed by a qualified professional installer only.  
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.*