

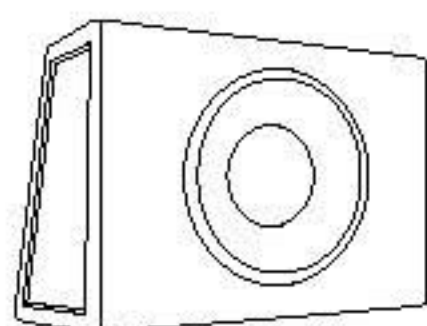



Idealgehäuse/Optimum Enclosures

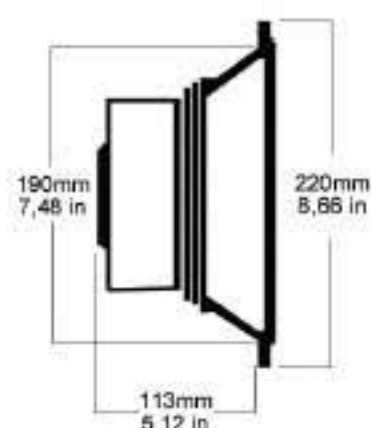

Geschlossen/Sealed 8.0 Liter

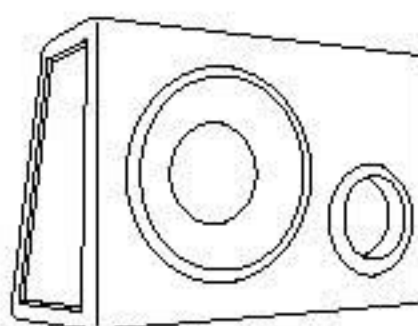

Reflex/Vented 14.4 Liter
7 x 16 cm CP* (1x)

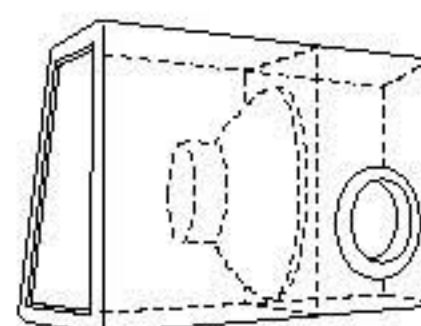

Bandpass 16,5 Liter (7 x 28.0 cm CP*)
7,5 Liter (7 x 14.4 cm CP*)

*Competition Port - Port-Abmessungen basieren auf der Verwendung eines HELIX Competition Ports
Port measures are based on the use of a HELIX Competition Port

Gleichstromwiderstand	Resistance	R_{dc} [in Ω]	3.5
Nennimpedanz	Impedance	Z_N [in Ω]	4
Resonanzfrequenz	Resonance Frequency	f_s [in Hz]	41.6
Belastbarkeit	Power Handling	RMS[in Watt]	250
Mechanische Güte	Mechanical Q	Q_{ms}	4.20
Elektrische Güte	Electrical Q	Q_{es}	0.27
Gesamtgüte	Total Q	Q_{ts}	0.26
Maximale Auslenkung	Xmax	Xmax[mm]	6.00
Dynamisch bewegte Masse	Moving Mass	m_d [in g]	50.0
Wirkungsgrad	Sensitivity	SPL [in dB]	87.2
Mechanischer Widerstand	Mechanical Resistance	R_{ms} [in Kg/s]	2.8
Nachgiebigkeit	Compliance	C_{ms} [in mm/N]	0.37
Antriebsfaktor	Force Factor	BL [in Tm]	11.8
Äquivalentvolumen	Equivalent Volume	V_{as} [in dm ³]	18.4